




JUNG PUMPEN

HEBEFIX PLUS / EXTRA



RESIDENTIAL TECHNOLOGY

COMPACT LIFTING STATIONS

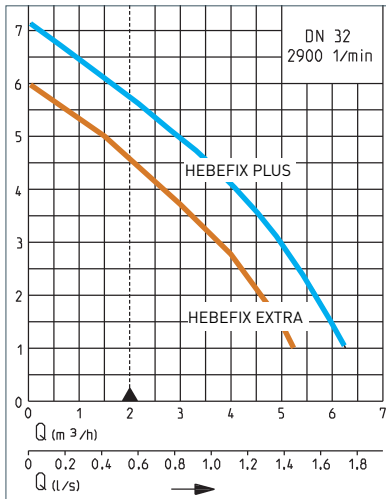

THE SUBTLE DIFFERENCE

The two Hebefix models. The **plus** model sets new standards in modern bathroom design. The compact form of the tank allows it to be mounted in all commercial front-wall as well systems as directly below the washbasin. It has various inlet openings for the connection of showers, bathtubs or washing machines.

For aggressive media such as saline fluids from the regeneration of water softening plants or condensate from condensing boilers and air-conditioning units (pH \geq 2.7), the **extra** model is the perfect option.

TARGET GROUPS

- ▶ A variant of the tried and tested U3K cellar drainage pump is integrated
- ▶ Flushing device reduces deposits in the tank
- ▶ Flexible use thanks to discharge branch on the right or left and five inlet options
- ▶ Integrated alarm with potential-free contact
- ▶ Odour-less due to activated carbon filter
- ▶ Smooth, scratch-free surface for easy cleaning
- ▶ With comprehensive installation accessories (check valve, plug-in seals, etc.)
- ▶ Two models are available: **plus** and **extra**
- ▶ Including UK plug

TECHNICAL DATA



Voltage Volt	Motor rating P1 (W)	Weight kg	Hmax m	Qmax m³/h
230	320 (plus) 300 (extra)	7	7 (plus) 6 (extra)	6.3 (plus) 5.3 (extra)
Dimensions (hxwx) in mm	Pressure pipe	Inlets mm	Code no.	
411 x 425 x 183	DN32 (Ø40)	1 x Ø40 4 x Ø50	JP48428 (plus) JP48429 (extra)	

Accessories: Installation kit for inspection opening **JP41075**
 Stop valve, 1¼" **JP44785**
 Ball valve, 1¼" in stainless steel **JP46111**

JUNG PUMPEN GMBH

33803 Steinhagen · Germany · Tel. +49 5204 170 · Fax +49 5204 80 368 · info@jung-pumpen.de · www.jung-pumpen.de

HEBEFIX PLUS - FRONT-WALL INSTALLATION



HEBEFIX PLUS - DIRECT CONNECTION



HEBEFIX EXTRA - AGGRESSIVE MEDIA

